


## Ocular Imaging Eye Model and Bracket



Product Codes

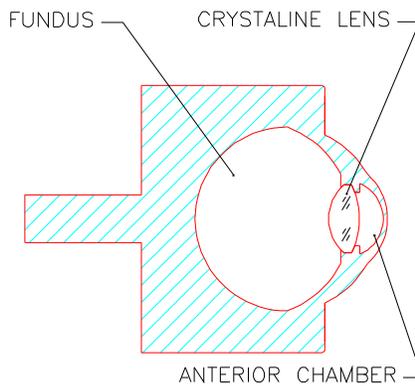

OEMI-7 (7mm Pupil)  
OEMB1 (Bracket)

### Design – 7mm Imaging Eye Model - (OEMI-7)

Designed to accurately simulate human eye.

Model includes natural surfaces of human eye including anterior chamber and crystalline lens

Every effort has been made to duplicate pathological problems found in the human eye.

Provides a stable fixed model for evaluation and training.

Arteries emanate from the disc with a fluorescent character allowing simulated fluorescein imaging

Optic disc has some fluorescent qualities

Designed for use with ocular fundus imaging systems such as slit lamps, binocular indirect ophthalmoscopes (BIO), fundus cameras and scanning laser ophthalmoscopes (SLO).

A peg on the back fits into the Ocular Eye Model Bracket (OEMB1) which can be attached to any slit lamp.

The eye has a retinal detachment showing an elevated retina and retinal tear.

It also displays a foreign body, optic disc and blood vessels.

A line at the 180 degree meridian designates the region of the equator.

### Design – Bracket - (OEMB1)

Designed with a position-adjustable post used to attach the eye model to the slit lamp chin rest.

A second post is supplied for slit lamps which require a longer post.

### Cleaning – Eye Model and Bracket

Wash and rinse thoroughly with soap and water.

Dry with soft tissue.

